



Zurn Engineered Water Solutions™

Spec-Dec™ Specified Decorative Systems



Swimming Pools



Resorts



Residences




Water Parks


Drainage with Style



Z886 6" Wide Pre-sloped Trench Drain Polyethylene

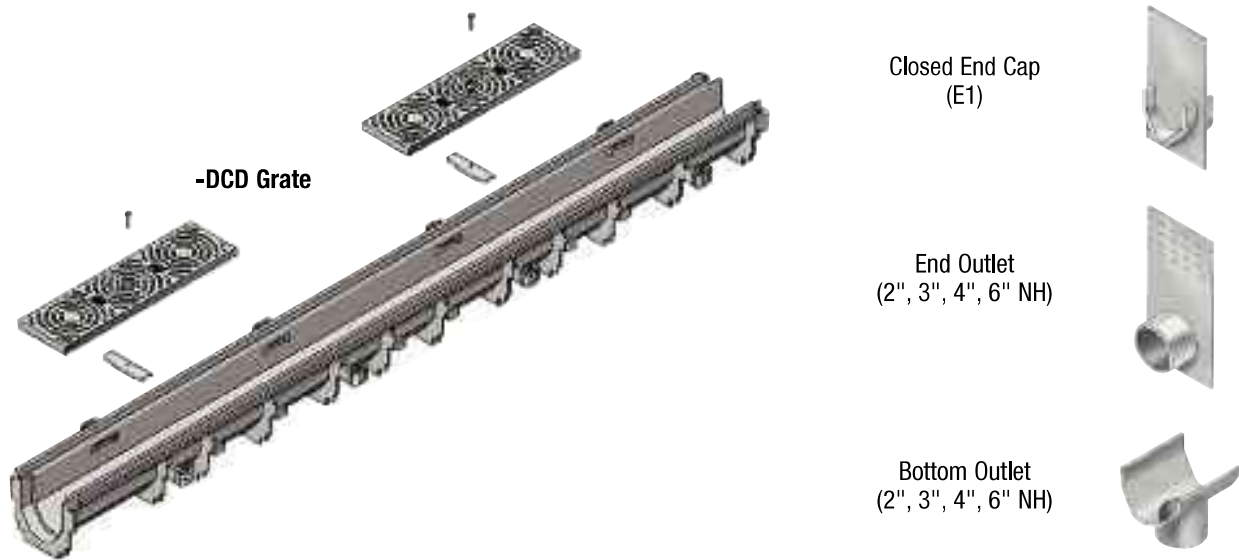

Z886 Installation Specification

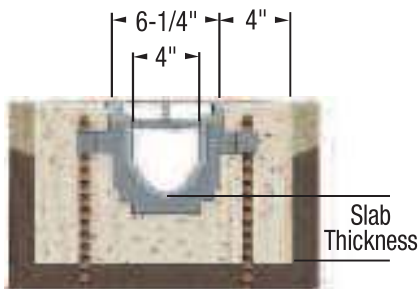

Z886 Features and Benefits

- 80" Modular Channel Sections with 20" and 40" Grates
- .75% Built-In Slope – Handles Greater Flows, Uniform Slope
- Radiused Bottom – Better Flow Rate, Less Debris Build-up
- Smooth High Density Polyethylene Structural Composite Interior – 0% Water Absorption
- Durable and Lightweight
- Sidewall Extensions for Sloped Runs Greater Than 120 Feet
- Paver Slot Option
- Variety of Gratings (Refer to Page 4)
- Grate Options – ADA, FAA, H-20 (For more information, refer to www.zurn.com.)
- Trench drain shall be Flo-Thru model Z886. For a complete engineering specification, visit www.zurn.com.



Courtyard


















Fountain




Outdoor Amphitheatre

Decorative Grate Information 6" Wide System Grates

Grate Profile	Suffix	Description	Material	Length	Open Area (Sq. In./Ft.)
	AWG	Aluminum Wire Grate	Aluminum	40"	78.00
	BCD	Circular Decorative	Bronze	20"	6.80
	BDD	Diagonal Decorative	Bronze	20"	15.20
	BG	Slotted Bar Grate	Galvanized Cast Iron	20"	23.93
	BZ	Bronze Decorative	Bronze	20"	17.57
	CG	Slotted Grate	Cast Iron	20"	18.57
	DCD	Circular Decorative	Ductile Iron	20"	6.80
	DDD	Diagonal Decorative	Ductile Iron	20"	15.20
	DOG	Decorative	Ductile Iron	20"	17.57
	FG	Fabricated Slotted	Galvanized Steel	40"	13.68
	FS	Fabricated Slotted	Stainless Steel	40"	13.68
	GD	Slotted Grate	Galvanized Ductile Iron	20"	18.57
	GMG	Mesh Grate	Galvanized Steel	40"	50.20
	HPB	Heel-Proof Slotted	Bronze	20"	15.50
	HPD	Heel-Proof Longitudinal	Ductile Iron	20"	15.50

Grate Profile	Suffix	Description	Material	Length	Open Area (Sq. In./Ft.)
	HPP	Heel-Proof Slotted	HDPE	20"	14.50
	HPS	Heel-Proof Slotted	Stainless Steel	20"	15.50
	PG	Fabricated Perforated	Galvanized Steel	40"	7.17
	PP	Plastic Perforated	Plastic	20"	13.50
	PS	Fabricated Perforated	Stainless Steel	40"	7.17
	RFG	Reinforced Slotted	Galvanized Steel	40"	13.68
	RFS	Reinforced Slotted	Stainless Steel	40"	13.68
	RPG	Reinforced Perforated	Galvanized Steel	40"	7.17
	RPS	Reinforced Perforated	Stainless Steel	40"	7.17
	SBG	Slotted Bar Grate	Stainless Steel	20"	13.93
	SCD	Circular Decorative	Stainless Steel	20"	6.80
	SDD	Diagonal Decorative	Stainless Steel	20"	15.20
	SMG	Mesh Grate	Stainless Steel	40"	50.20
	SOG	Decorative	Stainless Steel	20"	17.57
	SWG	Stainless Wire Grate	Stainless Steel	40"	78.00

Z880 2-1/2" Wide Non-sloped Trench Drain

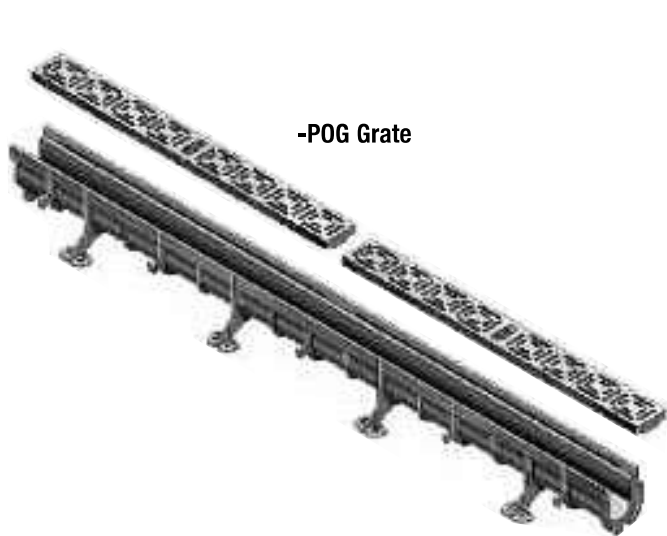

Closed End Cap
(E1)




End Outlet
(1-1/2" NH)




Bottom Outlet
(1-1/2" NH)


Z880 System Highlights



90° Connector
Channel with Grate




Bedding Feet



45° Connector
Channel with Grate

Z880 Installation Specification

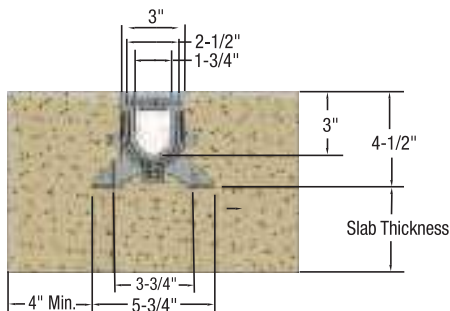

Z880 Features and Benefits

- 48" Modular Channel Sections with 24" Grates
- Durable and Lightweight
- 3" Trench Depth
- Prefabricated 45's and 90's
- Five Standard Colors – Gray, Brick Red, Blue, Sand, White
- Variety of Gratings
- Trench drain shall be Flo-Thru model Z880. For a complete engineering specification, visit www.zurn.com.

Z880 Available Colors



Gray



Brick Red



Blue



Sand



White

2-1/2" Wide System Grates

Grate Profile	Suffix	Description	Material	Length	Open Area (Sq. In./Ft.)
	AWG	Aluminum Wire Grate	Aluminum	24"	18.00
	BZ	Bronze Decorative	Bronze	24"	6.69
	POG	Plastic Decorative	HDPE	24"	6.69
	SOG	Stainless Decorative	Stainless Steel	24"	6.69
	SWG	Stainless Wire Grate	Stainless Steel	24"	18.00



Shower Floor



Shower Floor - 90° Corner