

EcoVantage[®] High Efficiency, 1.28 GPF, STD Height, Elongated, Siphon Jet Toilet

Architectural/Engineering Specification:

Vitreous china, high efficiency, 1.28 gpf low consumption, high performance siphon-jet toilet with 3" flush valve, elongated front rim and 12" standard rough-in.

Product Features:

- 1.28 gpf (gallons per flush)
- High efficiency toilets (HET) reduces potable water usage over 20%
- · Vitreous china
- 3" Flush valve for powerful flushing
- · Chrome plated metal handle
- · Elongated front rim
- EcoVantage® siphon-jet design
- · Extra large foot print for easy retro-fit
- 2 1/8" Fully glazed trapway
- · Chloramine resistant internal components
- Maximum performance (MaP) score of 1000g
- · Concealed sanitary bar
- 2 1/2" Trap seal
- 10" x 8" water surface
- · Includes bolt caps
- Shipping weight: 89 lbs.

Options:

| -IN | Insulated tank |
|-----|--------------------------------------|
| -RH | Vitreous China right-hand lever tank |

Recommended Trim:


Z5958SS-EL

Elongated, white, closed front toilet seat with cover & stainless steel check hinge. Z5972-COMB Closet bolt/wax ring kit. Z8800-CR Standard stop with flexible closet riser.

Optional Trim:

Z5975-FLO-JR PVC Flo-Bowl Jr. closet flange kit

TAG _____

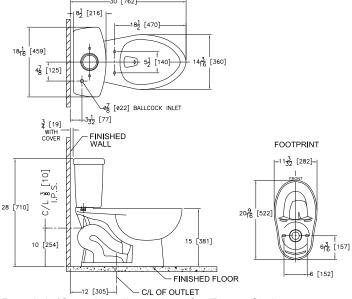

Rough-in/Overview dimensions for Z5555 Series

See Zurn One Systems for suggested packages.

Architectural/Engineering Approval

Compliance and Certification:

WaterSense Compliant



The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Fixture dimensions meet ASME A112.19.2/CSA B45.1 requirements. In Canada - Consult local codes and standards.

ZURN INDUSTRIES, LLC 511 W. Freshwater Way, Milwaukee, WI U.S.A. 53204 · Ph. 1-855-ONE-ZURN, Fax 919-775-3541 In Canada: ZURN INDUSTRIES LIMITED 7900 Goreway Drive, Unit 10, Brampton, Ontario L6T 5W6, Ph. 905-405-8272, Fax 905-405-1292