




# Rabbeted thresholds


## 564

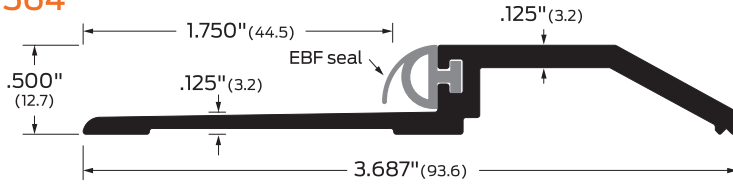

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b>	<b>ANSI/BHMA:</b>	
A, BK, D, G	E, EL, V3,		564A, 564D, 564G, 564BK	J36300
B, B-ORB	EV3, ELV3		564A-E, 564D-E, 564G-E, 564BK-E	J36400
	(not available for B-ORB finish)		564B	J16300
			564B-E	J16400

Suitable for sound control applications and OEM use.  
Neoprene extruded bulb/finger for double-sealing protection.


## 566

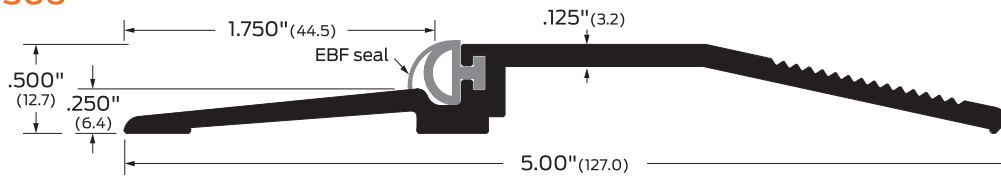

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b>	<b>ANSI/BHMA:</b>	
A, BK, D, G	E, EL, V3,		566A, 566D, 566G	J36100, J36130
	EV3, ELV3		566A-E, 566D-E, 566G-E, 566BK-E	J36200, J36230

Neoprene extruded bulb/finger for double-sealing protection.


## 567

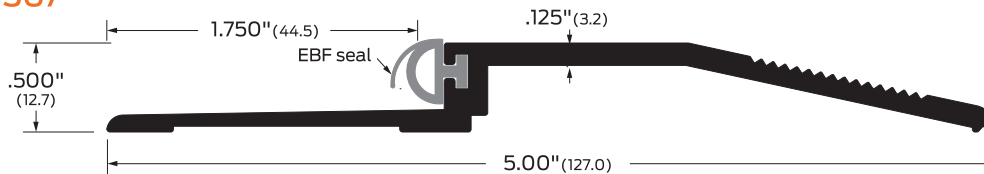

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b>	<b>ANSI/BHMA:</b>	
B, B-ORB	E, EL, V3,		567B	J16100
	EV3, ELV3		567B-E	J16200
	(not available for B-ORB finish)			

Extruded bulb/finger for double-sealing protection.

## 568

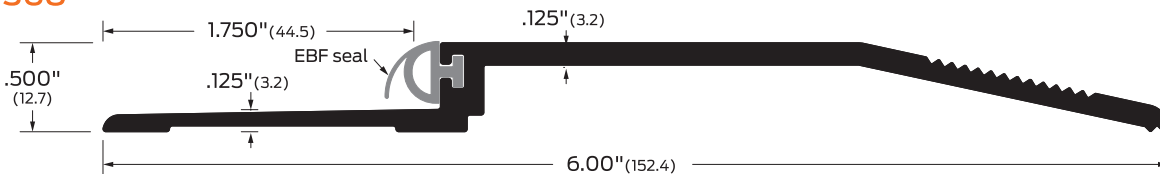

<b>Finishes:</b>	<b>Options:</b>	<b>BHMA</b>	<b>ANSI/BHMA:</b>	
A, BK, D, G	E, EL, V3,		568A, 568D, 568G, 568BK	J36100
	EV3, ELV3		568A-E, 568D-E, 568G-E, 568BK-E	J36200

Neoprene extruded bulb/finger for double-sealing protection.

See Thresholds Accessories & options page for details.

**Finishes:**

- A** Aluminum mill finish
- BK** Aluminum black anodized
- D** Aluminum dark bronze anodized
- G** Aluminum gold anodized
- B** Bronze, architectural mill finish
- B-ORB** Oil-rubbed bronze

**Options:**

- E** Epoxy abrasive tread
- EL** Photoluminescent and abrasive epoxy tread
- V3** Full body strength fill
- EV3** Epoxy and full body strength fill
- ELV3** Photoluminescent and abrasive epoxy tread, full body strength fill

**Note:**

Special anchors available for mounting most thresholds on concrete surfaces.