


Low Profile Beveled Vision Lite For Fire Rated Doors. Self-Attaching Frame Has Single-side fasteners
Available in Round Shapes and with Wood Veneer for Glass 3/16" to 1/4"

SPECIFICATIONS:

Material:	20 gauge CRS frame. Min Size 3" x 3", Max 60" x 104". See Fire Rating Below.
Construction:	1-1/4" trim with radius corners, mitered and welded. Continuous glass retainer, countersunk mounting holes in the bevel on non-corridor side.
Door:	For 1-3/4" door. For other sizes, see models VLFIG and VLFEZIG.
Fasteners:	#8 x 7/8" flathead phillips SMS. Woodlite has wood veneer plugs covering screw heads.
Powder Coat Finishes:	____ (B) Mineral Bronze ____ (G) Gray Primer (stock colors for VSL) ____ (BK) Black ____ (FBK) Flat Black ____ (W) White ____ (SB) SC Beige ____ (SA) Satin Aluminum ____ (R) Red ____ (S) Sand ____ (AB) AMS Beige ____ (GH) Gray Hammettone Color Samples Online
Glass:	3/16" - 1/4" glazing to be ordered separately from Glazing Section of catalog. Use fire rated glazing with Warnock Hersey (WHI) or UL classification markings for fire rated applications. Visible light is 2" under rough opening size. <u>Glass size is 1" under order size.</u> Fire-Rated Air Louvers Glazing to fit this Product: WS, UL, KFRF, PPF, PYRO.
Fire-Rating, Testing & Listings:	When installed in properly rated and approved door, ratings up to 3 hours can be achieved, depending on the glazing used. See glazing ratings for max exposed area. Tested and Listed for UL 10C and Criteria of UBC 7-2 Positive Pressure.

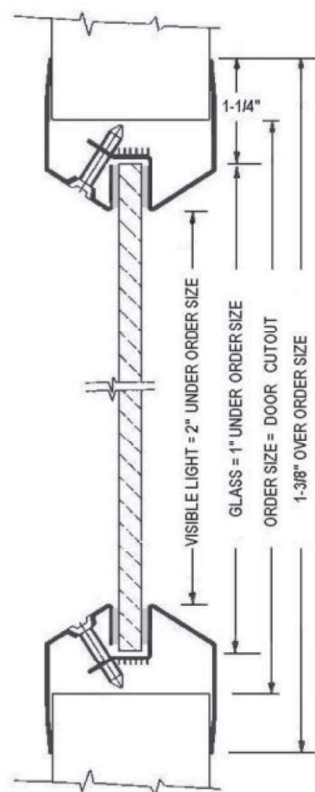

OPTIONS AT ADDITIONAL COST:



PAK:	Includes Vision Lite, Glass Sized to Fit, Applied Glazing tape for UL10B Installations, Securely Packaged Individually. See First Page in Vision Lite Catalog.
UBC 7-2 Installation:	____ Additional intumescent tape for Positive Pressure UL10C 20 minute combustible core wood doors installation. See detailed installation instructions.
Finishes & Materials:	____ (S) 20 Gauge Stainless Steel: #4 Finish. ____ (G) Galvanized Sheet for Exterior Applications. ____ (EG) Electro Zinc Plating for Maximum Corrosion Resistance.
Woodlite Wood Veneers:	____ VWL .018 Wood Veneer to Match Wood Finish. (except round models) ____ Veneer Type: (WB) White Birch, (RO) Red Oak, (WO) White Oak, (MA) Maple, (CH) Cherry, (HM) Honduras Mahogany. See website for more colors & photos.
Fasteners:	____ Torx ____ Hex head ____ Other: _____
Mullions:	Factory welded to vision lite & painted. See VSL-G Page in this section to order.
Round Vision Lite:	____ SLR-12: One piece, 18 gauge construction. 11" glazing. (n/a (S) material) ____ SLR-18: One piece, 18 gauge construction. 17" glazing. (n/a (S) material) ____ SLR-24: One piece, 18 gauge construction. 23" glazing. (n/a (S) material)
Custom:	Smaller or larger size or other options; Contact Customer Service for special orders.

**STOCK ITEM - MANY
STANDARD SIZES OF VSL
FRAMES IN STOCK FOR
NEXT DAY SHIPMENT FROM
ALL WAREHOUSES**

Order Format:

VSL, SLR, VWL Option S,G,EG W H Color

Example: VSL 1212GH

Interpretation of Fire and Building Codes May Vary. Consult with the Local Authority Having Jurisdiction (AHJ) to determine appropriate standards.

	Distributor:	Width: ____ x Height: ____
	Architect:	Quantity:
	Contractor:	Model:
	Project:	Date: ____ Version: ALSPDS1001
<p>HQTRS:4450 WEST 78TH ST CIR., BLOOMINGTON, MN 55435-5416 PH: 800-554-6077 FAX: 952-835-2218 EMAIL: SALES@AIRLOUVERS.COM VISIT WWW.ACTIVARCPG.COM FOR THE MOST UPDATED PRODUCT INFORMATION • AN ACTIVAR CONSTRUCTION PRODUCTS COMPANY ACPG WEST COAST (AIR LOUVERS MANUFACTURING):COMMERCE CA • WAREHOUSES:LANCASTER PA, ATLANTA GA, CHICAGO IL , Bloomington MN</p>		