
<u>Post-formed Countertops –</u>

Laminated Countertops Data Sheet



Our **Post-formed** laminated countertops are ideal for kitchens, vanities and workstations for residential, commercial or industrial applications where inexpensive and low maintenance counters are required. Available in a wide range of colours, sizes and profiles, these counters are aesthetically pleasing while also improving sanitation with its seamless finish. Installation can be wall hung with brackets or on cabinets.

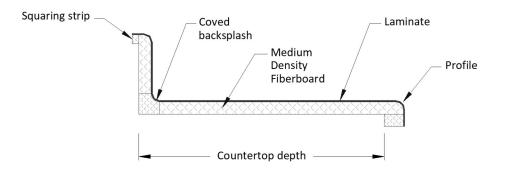

Construction:


Post-formed counters are made of high quality M.D.F. (Medium Density Fibreboard), laminated with 1mm thick H.P.L. (High Pressure Laminate), bonded under pressure at 85psi using a specially formulated spray applied contact adhesive and post-formed (using heat and pneumatics to bend the laminate) to the substrate. Counters are furnished with a squaring strip to the back to accommodate bad walls.

Sizes:

Post-formed countertops are fabricated in 2,400mm or 3,620mm lengths as determined by the laminate sheet size available, in the colour selected. Standard depths for vanities are 610mm but can be custom made to your measurements.

Profiles:

Because the laminated is heated and bent, all profiles are rounded. Below are the standard profiles offered by Pouchet for post-formed countertop.

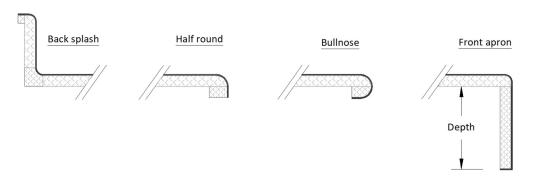


Neville C. Pouchet Limited reserves the right to, and does from time to time, make changes and improvements in design & specification. Rev: Post-formed CT-11112021

Laminated Countertops Data Sheet



Support Brackets:

Where applicable, self-supporting or floating countertops can be supplied with mild steel, wall angle brackets, painted with red oxide primer. Based on the wall construction and countertop profile, there are brackets for masonry or drywall applications and a front apron reinforcing bracket. Masonry brackets are secured to the wall with expansion sleeve anchor bolts whereas drywall brackets use toggler bolts. Installed at recommended spacing, these brackets have been tested to exceed 168kg of force. Countertops and apron reinforcing brackets are then fastened from the underside with stainless steel self-tapping screws.

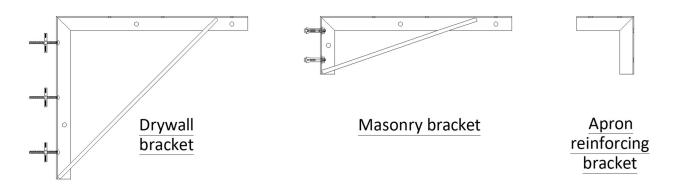

Warranty:

Post-formed countertops shall be free from defects in workmanship for a period of one (1) year from date of purchase. The entire perimeter of the countertop including basin or sink cut outs must be sealed with an appropriate silicone. In the event of defects claim, a site visit will be arranged by a qualified technician, after which Neville C. Pouchet Limited will either repair or replace these components free of charge.